


Standard Lightweight Bossed Rubber Lined Clips

Product Description -

Lightweight bossed pipe clips suitable for low weight, low movement pipework solutions. These lightweight clips come standard in Bright Zinc Plated, hung from the boss of the clip on one M8 / M10 rod and contain an EPDM rubber lining suitable for temperature ranges -50°C to 110°C.

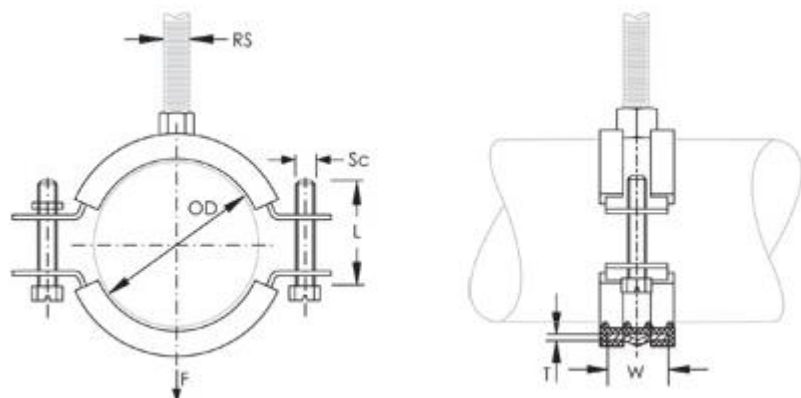

Product Finishes -

- Bright Zinc Plated

BZP Steel Sizes M8 / M10-

Part Number	Outer Diameter OD	Pipe Size	NB/DN	Width W	Thickness T	Screw Diameter Sc	Screw Length L	Static Load F
596460	12 – 15 mm	1/4"	8	20 mm	1.5 mm	M6	20 mm	1,000 N
596470	15 – 19 mm	3/8"	10	20 mm	1.5 mm	M6	20 mm	1,000 N
596480	20 – 24 mm	1/2"	15	20 mm	1.5 mm	M6	20 mm	1,000 N
596490	25 – 30 mm	3/4"	20	20 mm	1.5 mm	M6	20 mm	1,000 N
596500	32 – 37 mm	1"	25	20 mm	1.5 mm	M6	20 mm	1,000 N
596510	40 – 45 mm	1 1/4"	32	20 mm	1.5 mm	M6	20 mm	1,000 N
595859	44 – 49 mm	–	–	20 mm	2.0 mm	M6	20 mm	1,300 N
595860	48 – 53 mm	1 1/2"	40	20 mm	2.0 mm	M6	25 mm	1,300 N
595870	54 – 58 mm	–	–	20 mm	2.0 mm	M6	25 mm	1,300 N
595880	59 – 63 mm	2"	50	20 mm	2.0 mm	M6	25 mm	1,300 N
595885	62 – 64 mm	–	–	20 mm	2.0 mm	M6	25 mm	1,300 N
596450	68 – 73 mm	–	–	20 mm	2.0 mm	M6	25 mm	1,300 N
595890	75 – 80 mm	2 1/2"	65	20 mm	2.0 mm	M6	25 mm	1,300 N
595900	82 – 86 mm	–	–	20 mm	2.0 mm	M6	25 mm	1,300 N
595910	89 – 91 mm	3"	80	20 mm	2.0 mm	M6	25 mm	1,300 N
595920	95 – 103 mm	–	–	23 mm	2.5 mm	M6	25 mm	1,300 N
595930	108 – 116 mm	4"	100	23 mm	2.5 mm	M8	25 mm	2,200 N
595940	121 – 127 mm	–	–	23 mm	2.5 mm	M8	25 mm	2,200 N
595980	129 – 135 mm	5"	125	23 mm	2.5 mm	M8	25 mm	2,200 N

BZP Steel Sizes M8 / M10 (Cont)-

Part Number	Outer Diameter OD	Pipe Size	NB/DN	Width W	Thickness T	Screw Diameter Sc	Screw Length L	Static Load F
595950	135 – 141 mm	–	–	23 mm	2.5 mm	M8	25 mm	2,200 N
595960	159 – 162 mm	–	–	23 mm	2.5 mm	M8	25 mm	2,200 N
595970	165 – 168 mm	6"	150	23 mm	2.5 mm	M8	25 mm	2,200 N
595971	198 – 202 mm	–	–	25 mm	3.0 mm	M8	25 mm	2,500 N
595972	210 – 215 mm	–	–	25 mm	3.0 mm	M8	25 mm	2,500 N
595973	216 – 220 mm	8"	200	25 mm	3.0 mm	M8	25 mm	2,500 N
595990	220 – 227 mm	–	–	30 mm	3.0 mm	M8	25 mm	2,700 N
595991	249 – 254 mm	–	–	30 mm	3.0 mm	M8	25 mm	2,700 N
595992	274 – 280 mm	–	–	30 mm	3.0 mm	M8	25 mm	2,700 N
595993	313 – 319 mm	–	–	30 mm	3.0 mm	M8	25 mm	2,700 N